

SEE SHEET L1.2

SEE SHEET L1.1

SEE SHEET L1.4



SEE SHEET L1.3

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

1 MATERIALS PLAN (OVERALL)

SCALE: 1" = 40'-0" @ 24"x36" (FULL SIZE) | 1" = 80'-0" @ 12"x18" (HALF SIZE)

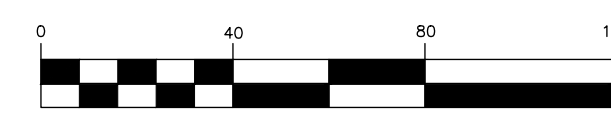

B W A BERNARDO | WILLS
ARCHITECTS PC



COPYRIGHT BERNARDO WILLS ARCHITECTS, PC 2013

WWW.BERNARDOWILLS.COM

FAX 509.838.4605

509.838.4511

SPOKANE WASHINGTON 99201

153 SOUTH JEFFERSON

B W A BERNARDO | WILLS
ARCHITECTS PC

B W A



100% BID SET
Construction Drawings
LANDSCAPE MATERIALS
PLAN (OVERALL)

Liberty Lake Regional Park - Phase I
Spokane County Project No. P13648

3707 S. Zephyr Road
Liberty Lake, WA 99019

Project No: 22-02-032
Drawn by:
Date: 01-17-24

L1.0



COPYRIGHT BERNARDO WILLS ARCHITECTS PC 2013

WWW.BERNARDOWILLS.COM

509.838.4605

509.838.4511

SPokane Washington 99201

153 SOUTH JEFFERSON

BERNARDO WILLS ARCHITECTS PC

BWA

8/25/23

PERMIT COMMENTS

100% BID SET Construction Drawings LANDSCAPE MATERIALS PLAN (WEST)

Liberty Lake Regional Park - Phase I Spokane County Project No. P13648

3707 S. Zephyr Road Liberty Lake, WA 99019

Project No: 22-02-032 Drawn by: Date: 01-17-24

L1.1

CONSTRUCTION NOTES

- CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
- CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
- CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
- CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
- CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
- CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
- CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
- ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
- IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
- CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
- CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES



BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%

LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND


- | SYMBOL | DESCRIPTION |
|--------|--|
| | 1 NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH) |
| | 2 NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX |
| | 3 WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT) |
| | 4 NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS |
| | 5 GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING) |
| SYMBOL | DESCRIPTION |
| | 10 GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0 |
| | 11 NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0 |
| | 13 ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2 |
| | 14 NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 15 NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 16 NEW CXT RESTROOM BUILDING |
| | 17 REMOVABLE BOLLARD, TYP. (MAGLIN MTB500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS) |
| | 18 NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP. |
| | 19 PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL) |
| | 20 SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY) |
| | 21 NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2 |
| | 22 NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER)) |
| | 23 BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION |
| | 24 NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS |
| | 25 NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION |
| | 26 NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY |
| | 27 STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2 |
| | 28 NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS. MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR. |
| | 29 FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL) |
| | 33 ALTERNATE NO. #01 PARKING LOT LIMIT LINE |

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATION(S) SHALL DICTATE QUANTITY.*

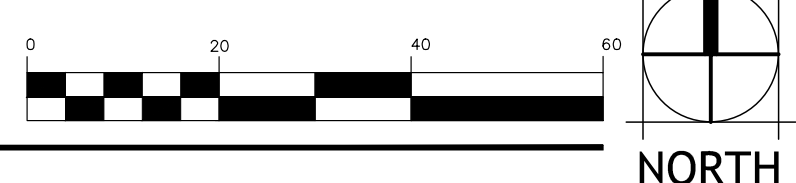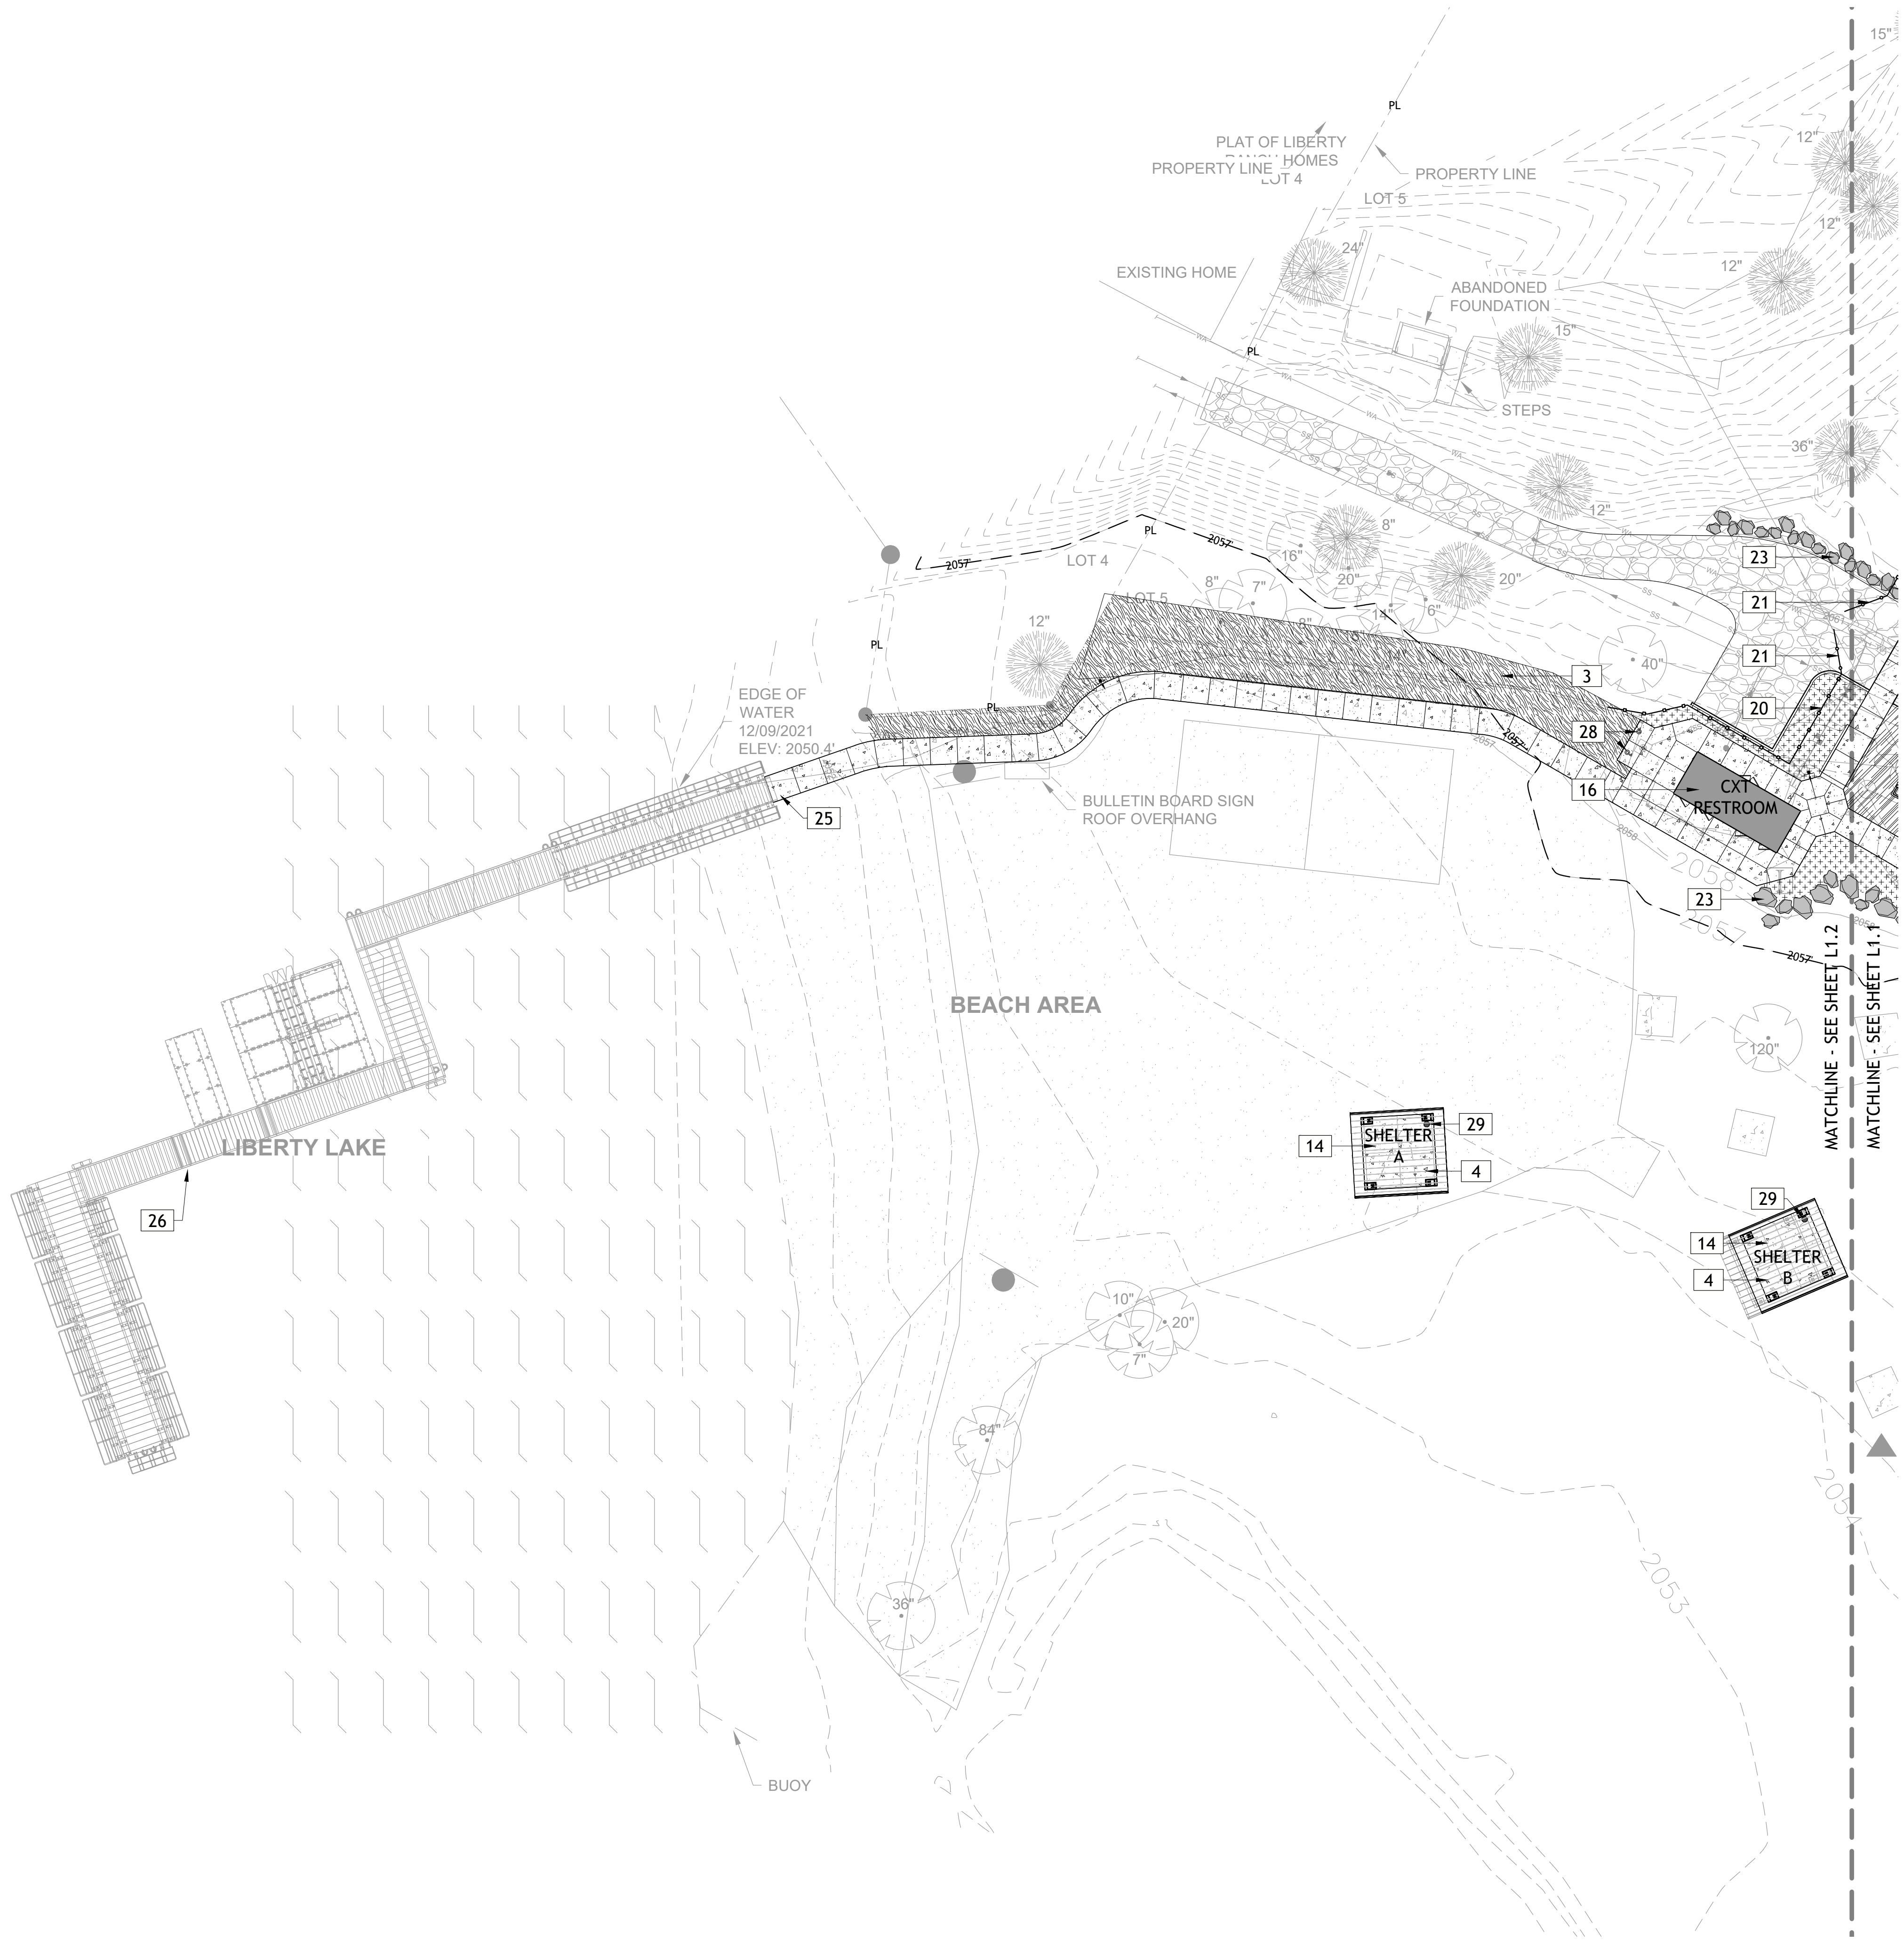

BWA BERNARDO WILLS ARCHITECTS PC



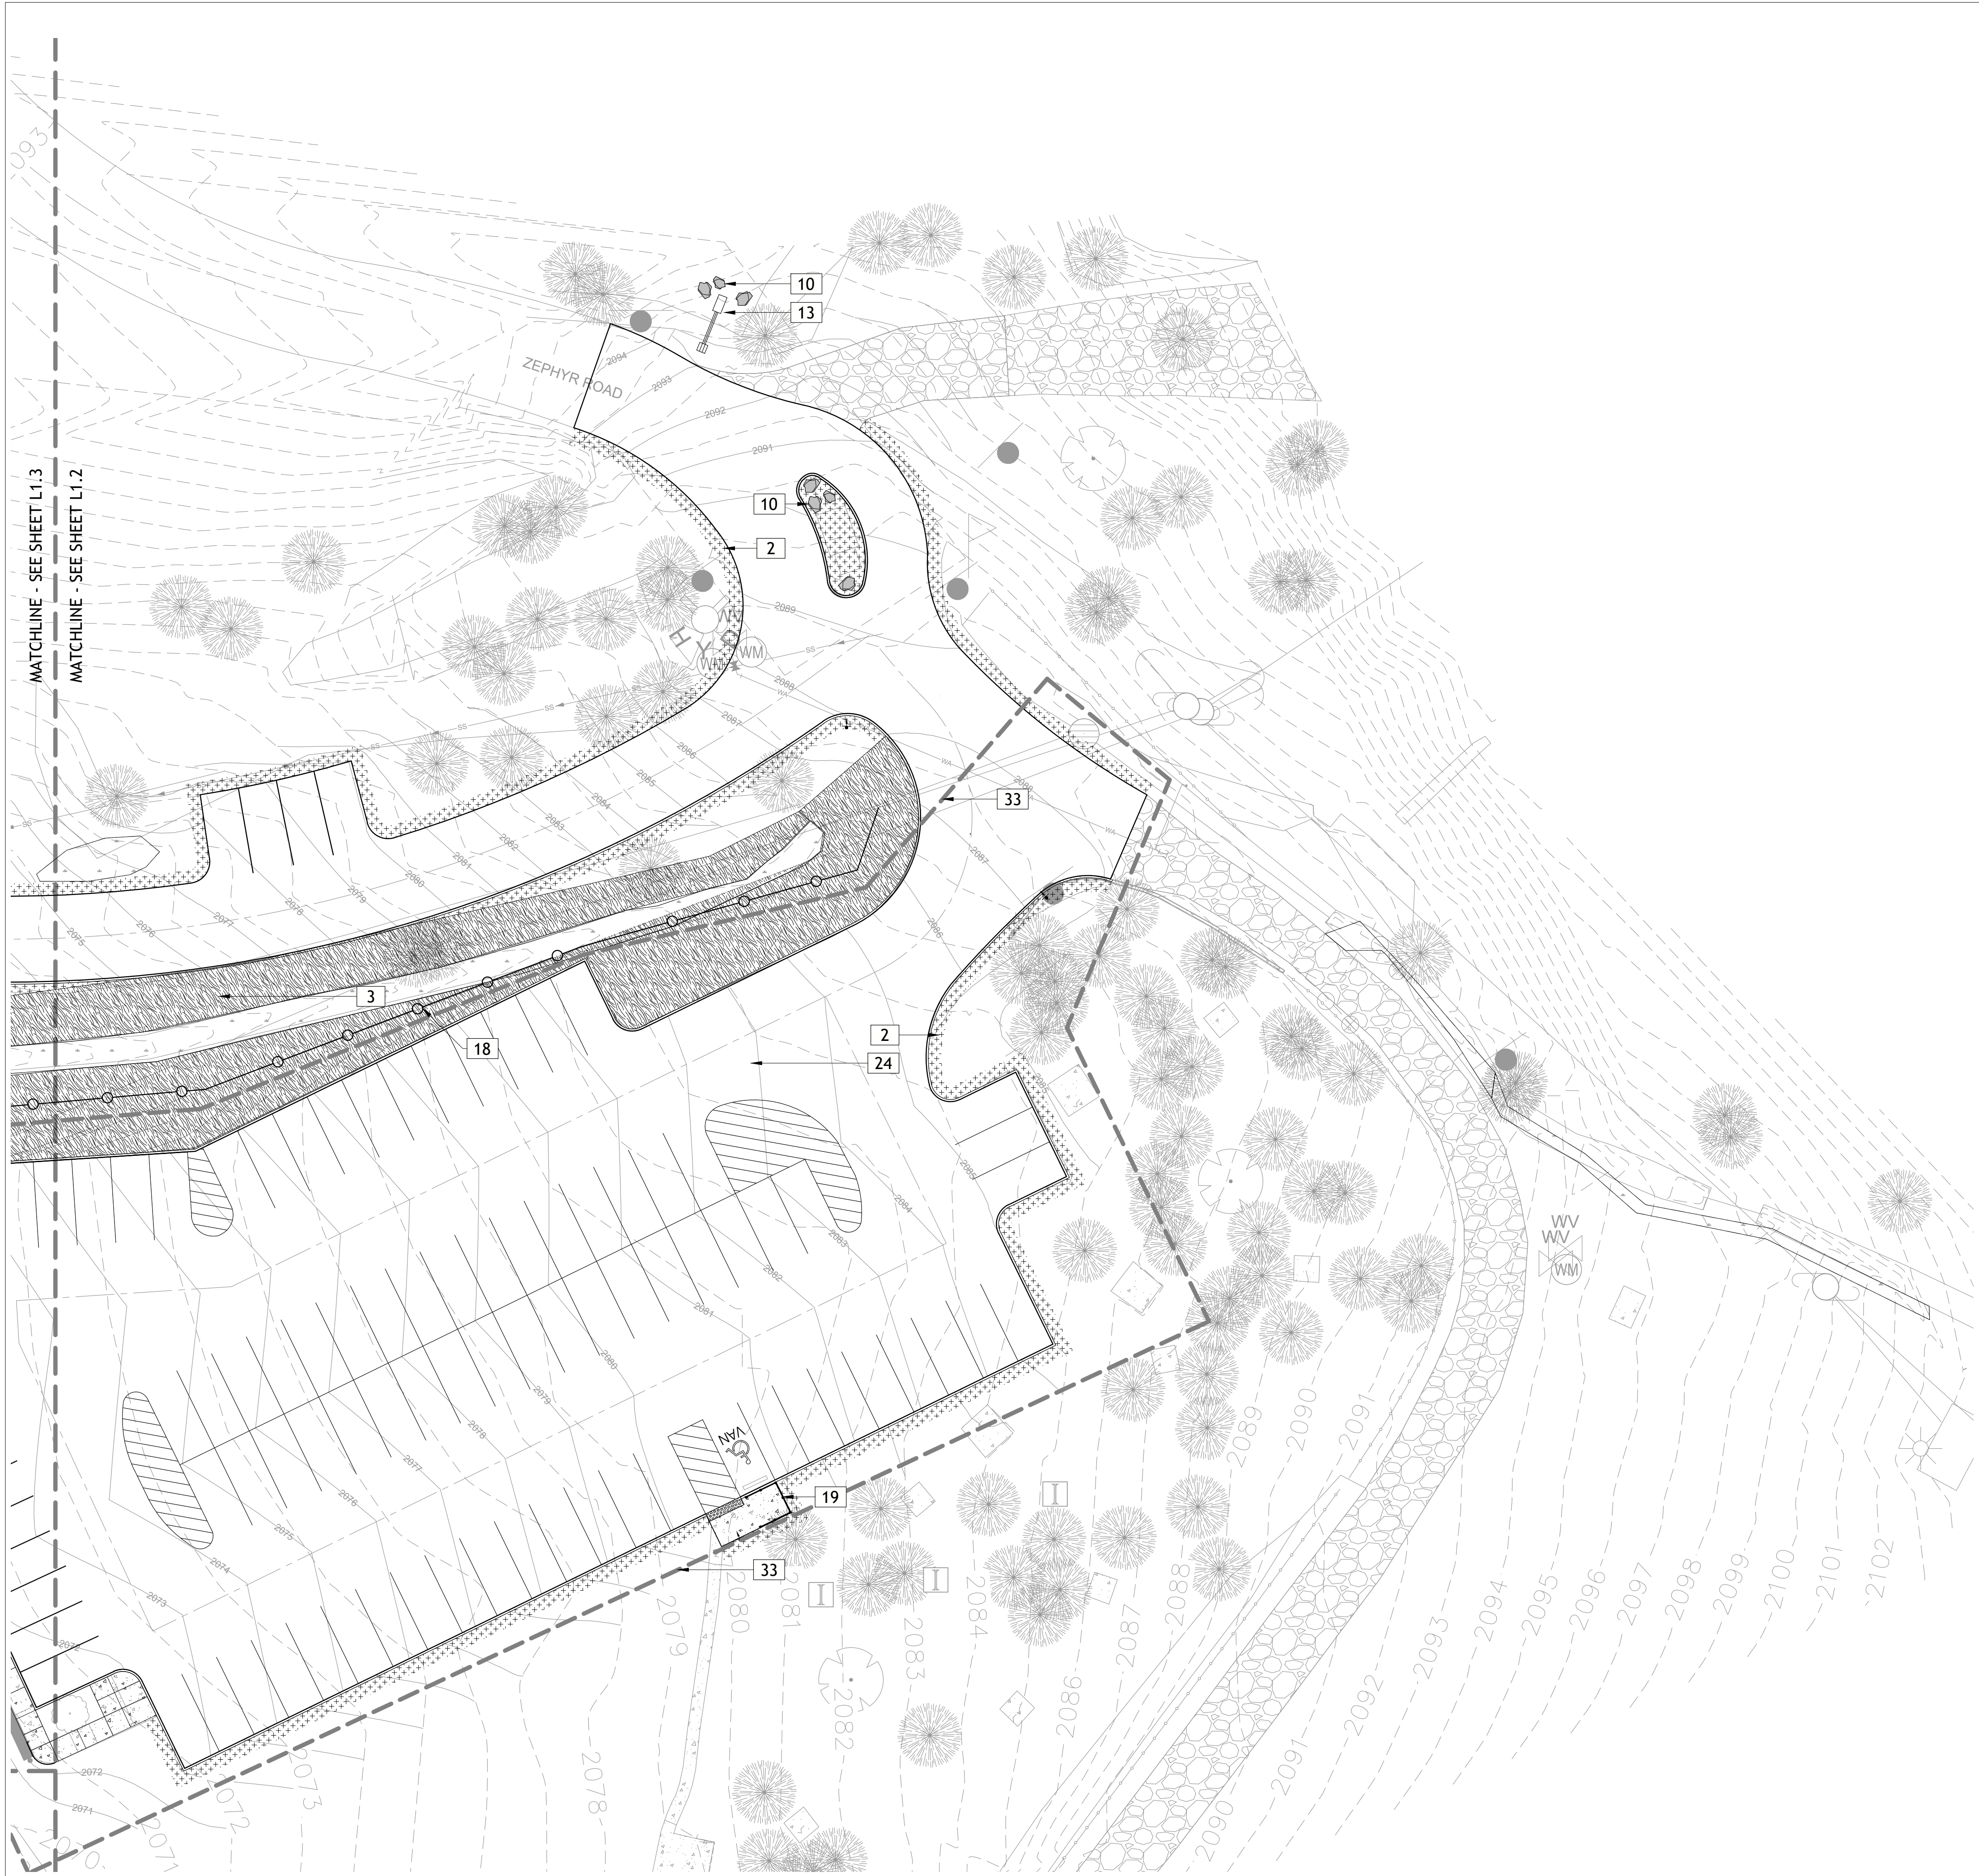

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES


BOULDER SIZING GUIDE		
BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%


LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND

- | | | |
|--|-----------|---|
| | 1 | NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH) |
| | 2 | NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX |
| | 3 | WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT) |
| | 4 | NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS |
| | 5 | GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING) |
| | 10 | GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0 |
| | 11 | NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0 |
| | 13 | ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2 |
| | 14 | NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 15 | NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 16 | NEW CXT RESTROOM BUILDING |
| | 17 | REMOVABLE BOLLARD, TYP. (MAGLIN MTB500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS) |
| | 18 | NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP. |
| | 19 | PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL) |
| | 20 | SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY) |
| | 21 | NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2 |
| | 22 | NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER)) |
| | 23 | BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION |
| | 24 | NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS |
| | 25 | NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION |
| | 26 | NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY |
| | 27 | STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2 |
| | 28 | NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS. MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR. |
| | 29 | FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL) |
| | 33 | ALTERNATE NO. #01 PARKING LOT LIMIT LINE |

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATION(S) SHALL DICTATE QUANTITY.*

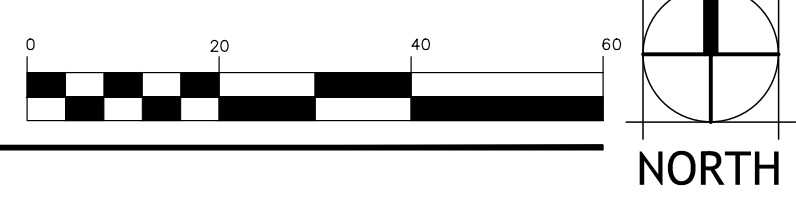

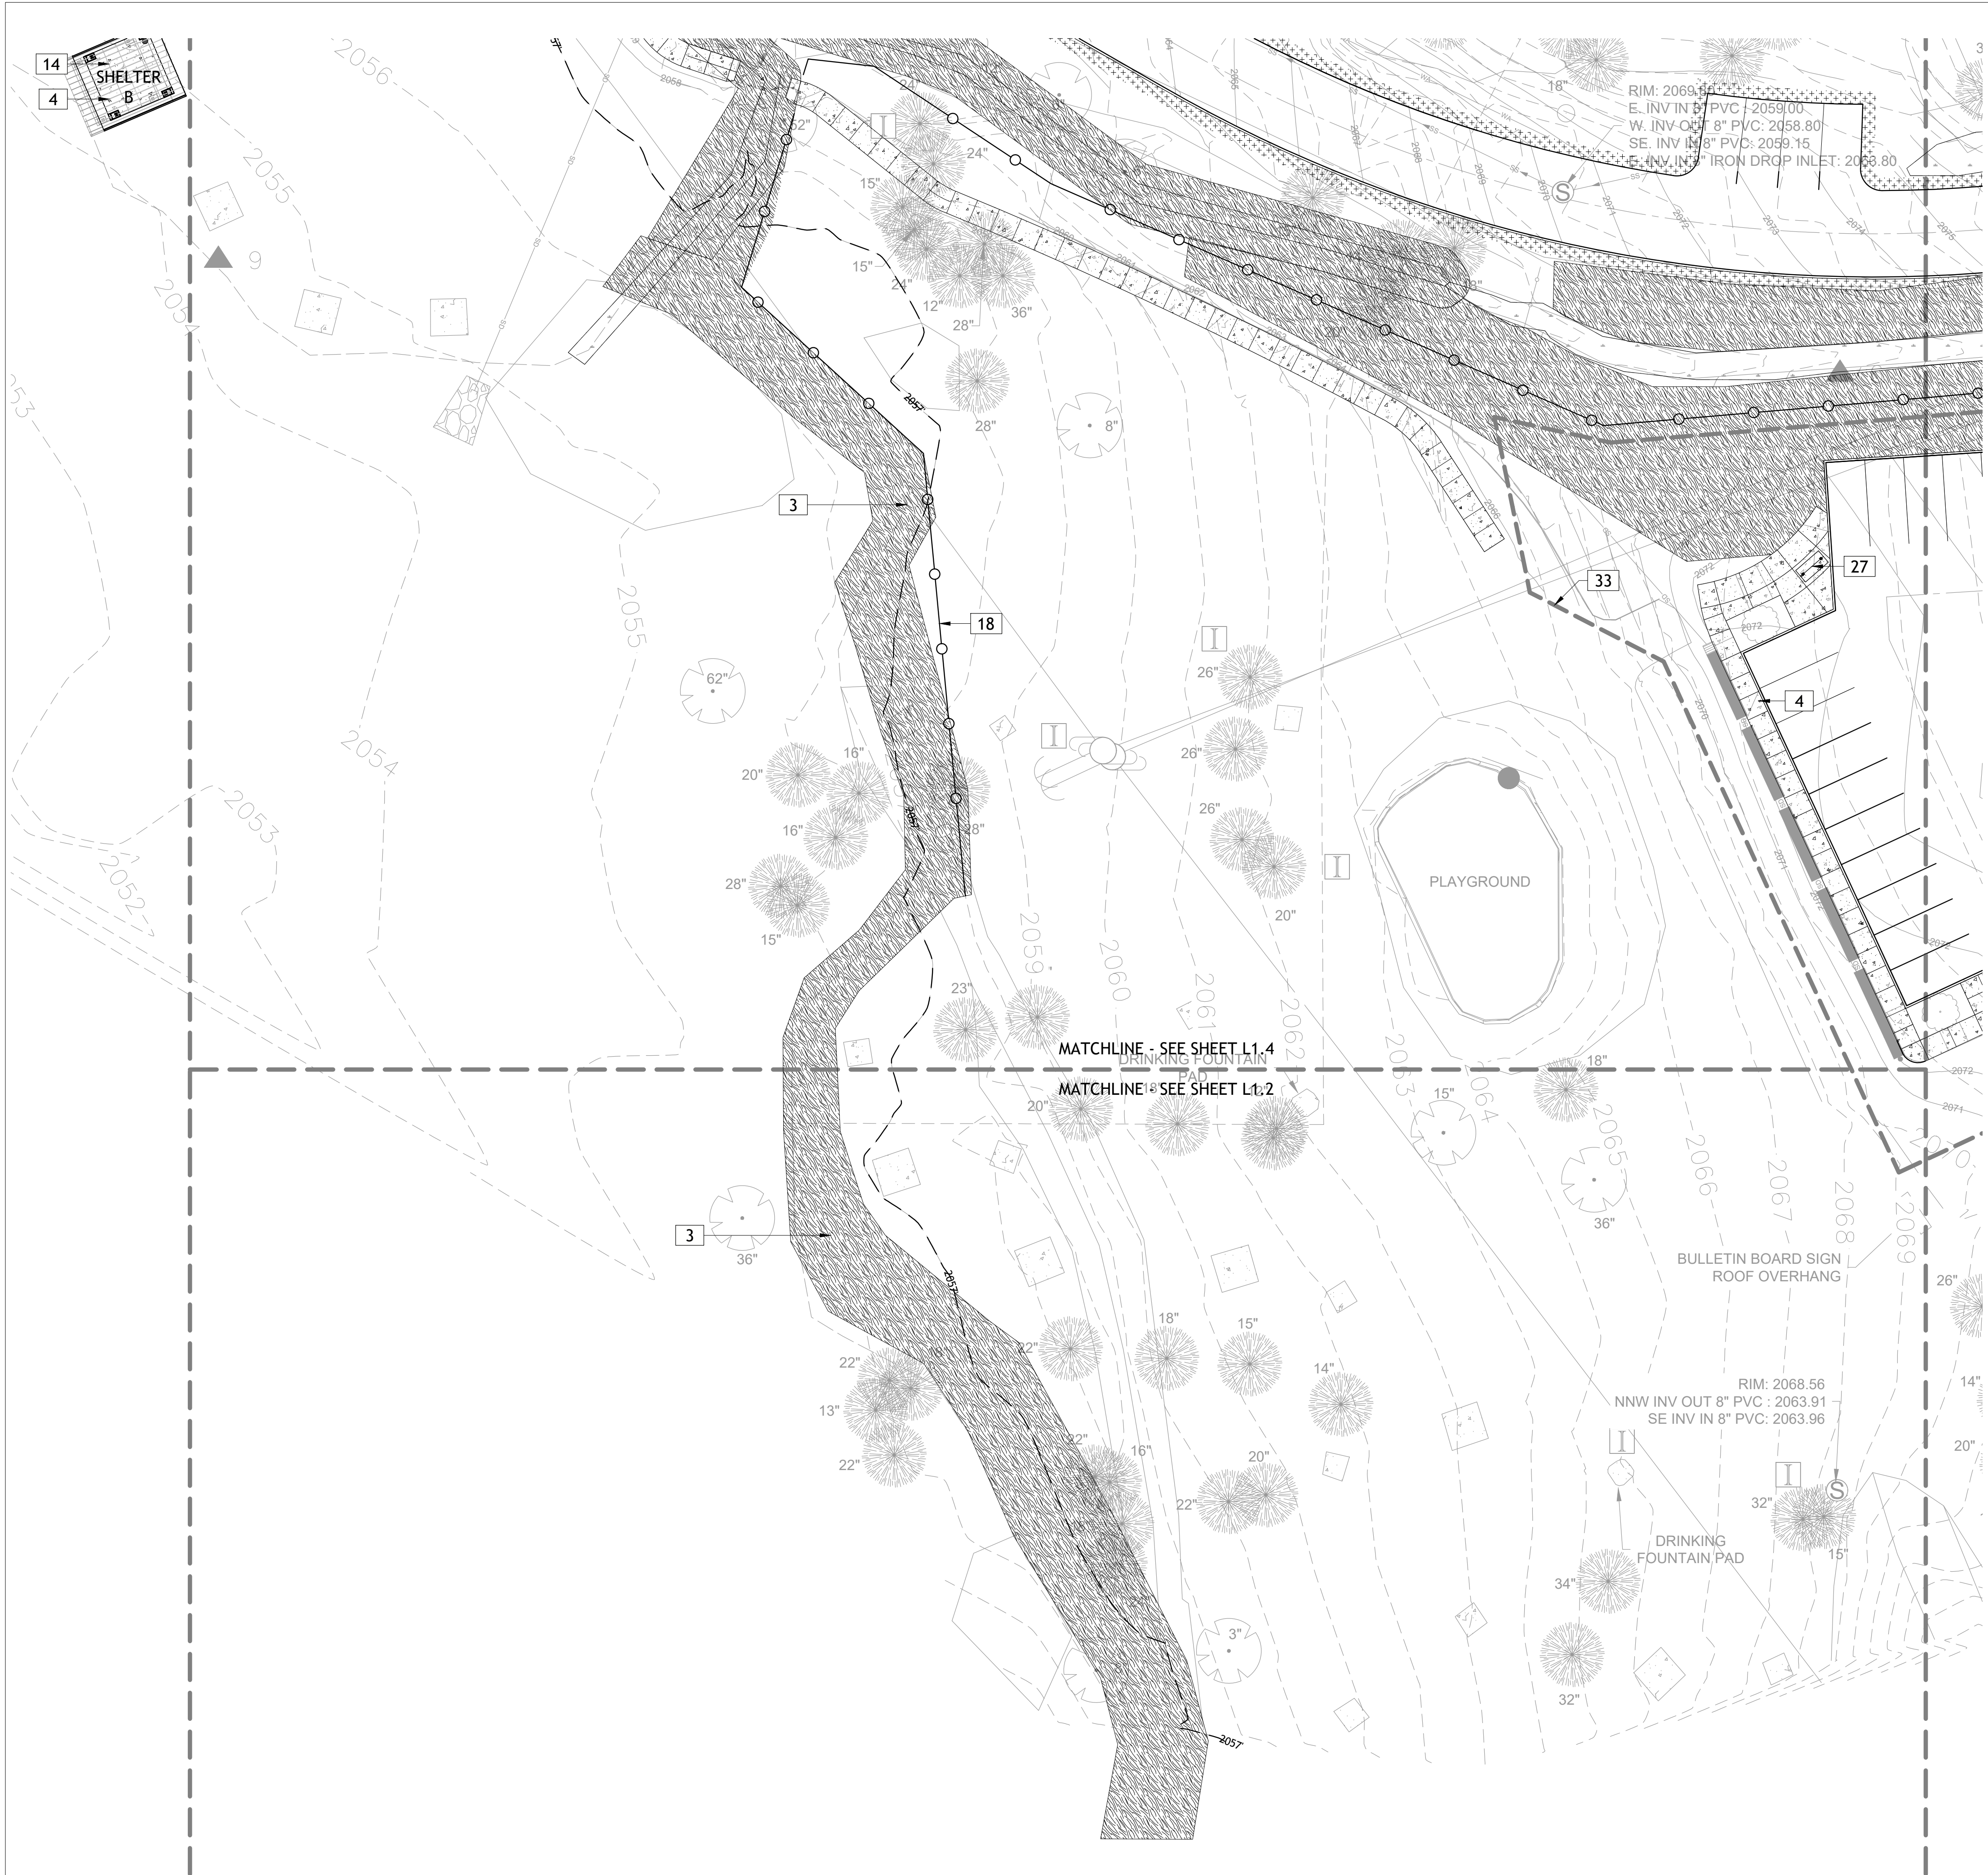

CONSTRUCTION NOTES

1. CONTRACTOR IS RESPONSIBLE FOR LOCATING PROPERTY LINE AND WORKING WITHIN THE PROPERTY BOUNDARY.
2. CONTRACTOR SHALL COMPLY WITH ALL LOCAL CODES AND ORDINANCES.
3. CONTRACTOR TO OBTAIN AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THIS SCOPE OF WORK.
4. CONTRACTOR SHALL FURNISH ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY FOR THE COMPLETION OF THE WORK.
5. CONTRACTOR TO VERIFY LOCATION OF ALL UTILITIES (INCLUDING OVERHEAD AND UNDERGROUND) PRIOR TO INITIATION OF ANY DEMOLITION OR OTHER CONSTRUCTION OPERATIONS. ANY DAMAGE TO EXISTING UTILITIES ON-SITE OR ADJACENT PROPERTY SHALL BECOME THE CONTRACTOR'S RESPONSIBILITY TO CORRECT.
6. CONTRACTOR TO COORDINATE ALL DEMOLITION AND CONSTRUCTION OPERATIONS WITH ARCHITECTURAL, CIVIL, AND ELECTRICAL ENGINEERING SHEETS.
7. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR ANY DAMAGE TO OR DEFACING OF NEW OR EXISTING CONCRETE FLATWORK, ASPHALT, TURF AREAS, AND/OR ANY OTHER EXISTING OR NEW SITE ELEMENTS AS A RESULT OF CONSTRUCTION ACTIVITIES.
8. ALL WORK SHALL BE PERFORMED BY PERSONS FAMILIAR WITH THIS TYPE OF WORK.
9. IN THE EVENT OF A DISCREPANCY, IMMEDIATELY NOTIFY LANDSCAPE ARCHITECT.
10. CONTRACTOR SHALL REFER TO DETAILS FOR ADDITIONAL INFORMATION AND REQUIREMENTS IN ADDITION TO THE DRAWINGS.
11. CONTRACTOR SHALL GUARANTEE ALL WORK, MATERIALS, AND PLANTS FOR A PERIOD OF ONE YEAR FROM THE DATE OF FINAL ACCEPTANCE.

LANDSCAPE BOULDER NOTES

BOULDER SIZING GUIDE		
BOULDER SIZE	AVG. DIMENSION	% PERCENT OF TOTAL COUNT
2-MAN	18 TO 28 INCHES	10%
3-MAN	28 TO 36 INCHES	45%
4-MAN	36 TO 48 INCHES	45%


LANDSCAPE BOULDERS, TYP. VARIOUS SIZES, REFER TO BOULDER SIZING GUIDE. BOULDERS SHALL BE ANGULAR GRANITE WITH TEXTURED SURFACE. SUBMIT BOULDER SOURCE AND MINIMUM OF (3) SAMPLE PHOTOS TO LANDSCAPE ARCHITECT FOR APPROVAL. EXCAVATED OR BLASTED ROCK WILL NOT BE ALLOWED ON THIS PROJECT. SEE DETAILS #04 & 05/SHEET L5.0.

MATERIALS LEGEND

- | | | |
|--|----------|--|
| | 1 | NEW LANDSCAPE BEDS (12" DEPTH ONSITE TOPSOIL AMENDED W/ 40% IMPORTED COMPOST (BY VOLUME) OVERHEAD SPRAY IRRIGATION 2" DEPTH DARK FINES BARK MULCH) |
| | 2 | NEW DRYLAND HYDROSEED (NO IRRIGATION) - SEE PLANTING PLANS FOR SEED MIX |
| | 3 | WETLAND MITIGATION AREA - SEE PLANTING PLANS & SHORELINE IMPACT ASSESSMENT FOR ADDITIONAL INFORMATION (SHOWN FOR COORDINATION PURPOSES ONLY, MITIGATION BY OWNER, NOT-IN-CONTRACT) |
| | 4 | NEW CONCRETE FLATWORK - SEE CIVIL & ARCHITECTURAL SHEETS |
| | 5 | GRAVEL SURFACING (IMPORTED 6" DEPTH MINIMUM 5/8" - MINUS CRUSHED BASALT AGGREGATE SURFACING) |
-
- | | | |
|--|-----------|---|
| | 10 | GRANITE LANDSCAPE BOULDERS, 2-4 MAN TYPICAL - SEE BOULDER SIZING GUIDE SHEET L1.0 & DETAILS #07 & 08/SHEET L5.0 |
| | 11 | NATURAL STONE RISERS, TYP. - SEE DETAIL #12/SHEET L5.0 |
| | 13 | ENTRY MONUMENT SIGN - SEE DETAILS #01 & 02/SHEET L5.2 |
| | 14 | NEW SMALL GROUP SHELTER - SEE DETAIL SHEETS A1.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 15 | NEW LARGE GROUP SHELTER - SEE DETAIL SHEETS A2.1 & S1.0 FOR ADDITIONAL INFORMATION |
| | 16 | NEW CXT RESTROOM BUILDING |
| | 17 | REMOVABLE BOLLARD, TYP. (MAGLIN MTB500-B2 SERIES BOLLARDS, 4.5IN. DIAMETER, H.S. STEEL TUBE CONSTRUCTION, COLOR SHALL BE YELLOW GLOSS) |
| | 18 | NEW 2-RAIL ROUND-RAIL CEDAR FENCE TO MATCH EXISTING ON-SITE FENCE, TYP. |
| | 19 | PORT-A-POTTY RESTROOM SCREEN - 3-SIDED 8FT. X 8FT. SQUARE REVAMP PANEL FENCE SYSTEM, PANEL DESIGN SHALL BE "BLADES" AS PROVIDED BY WWW.REVAMPANELS.COM. COLOR SHALL BE DARK GREEN. (CONTRACTOR SHALL SUBMIT SHOP DRAWINGS & COLOR SAMPLE FOR APPROVAL) |
| | 20 | SEPARATION FENCE TO MATCH EXISTING TYPE & HEIGHT (CONTRACTOR TO FIELD VERIFY) |
| | 21 | NEW BARRIER GATE FOR ADJACENT NEIGHBOR'S ACCESS - SEE DETAIL #03/SHEET L5.2 |
| | 22 | NEW PUMP STATION SURROUND & SCREENING (8FT. HT. BLACK VINYL-COATED CHAIN LINK FENCE BLACK PRIVACY SLATS ALL SIDES 10FT. CLEAR OPENING DOUBLE SWING GATES W/ PRIVACY SLATS PROVIDE OPTION FOR FUTURE PADLOCK (BY OWNER)) |
| | 23 | BOULDER RETAINING WALLS - SEE CIVIL SHEETS & DETAILS #09 & 10/SHEET L5.0 FOR ADDITIONAL INFORMATION |
| | 24 | NEW ASPHALT PAVING & CURBS - SEE CIVIL SHEETS |
| | 25 | NEW CONCRETE ABUTMENT - SEE DETAILS #05/SHEET L5.2 FOR ADDITIONAL INFORMATION |
| | 26 | NEW DOCK (NOT-IN-CONTRACT) - SHOWN FOR INFORMATIONAL PURPOSES ONLY |
| | 27 | STANDARD COUNTY INFORMATION KIOSK - SEE DETAIL #04/SHEET L5.2 |
| | 28 | NEW EXTERIOR SHOWER & FOOT WASH, TYP (2) - 8IN. DIAMETER ADA COMPLIANT OUTDOOR SHOWER & FOOTWASH W/ GRAB BARS, MANUFACTURED BY WSF WILLOUGHBY STAINLESS FOUNTAINS, MODEL NUMBER WODS-ADA STAINLESS STEEL SERIES TYPE 316 STAINLESS STEEL, WITH 4 BOLT MOUNTING KIT, ONE FOUNTAIN SHALL HAVE A RECESSED HOSE BIBB W/LOCK DOOR. |
| | 29 | FIRE EXTINGUISHERS SHALL BE PROVIDED AND INSTALLED BY CONTRACTOR FOR ALL SHADE STRUCTURES (3 TOTAL) |
| | 33 | ALTERNATE NO. #01 PARKING LOT LIMIT LINE |

* ALL QUANTITIES PROVIDED SHALL BE CONFIRMED BY CONTRACTOR AND ARE SHOWN FOR REFERENCE ONLY. IN THE CASE OF A DISCREPANCY BETWEEN THE SCHEDULE AND PLAN, THE PLAN LOCATIONS SHALL DICTATE QUANTITY.*

1 MATERIALS PLAN (SOUTH)
 SCALE: 1" = 20'-0" @ 24"x36" (FULL SIZE) | 1" = 40'-0" @ 12"x18" (HALF SIZE)

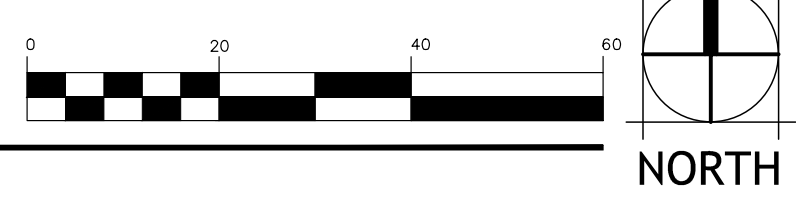

B W A BERNARDO WILLS ARCHITECTS PC



BERNARDO WILLS ARCHITECTS PC
 153 SOUTH JEFFERSON SPOKANE WASHINGTON 99201
 509.838.4511
 509.838.4605
 WWW.BERNARDOWILLS.COM
 COPYRIGHT BERNARDO WILLS ARCHITECTS, P.C. 2013

100% BID SET
Construction Drawings
LANDSCAPE MATERIALS
PLAN (SOUTH)

Liberty Lake Regional Park - Phase I
Spokane County Project No. P13648

3707 S. Zephyr Road
 Liberty Lake, WA 99019

Project No: 22-02-032
 Drawn by:
 Date: 01-17-24
L1.4